



Slide 1

Slide notes: Although by default the IES Cloud service operates on a single connection choice, it is possible to add multiple connections manually. Note our folder navigation on the install path as shown here.

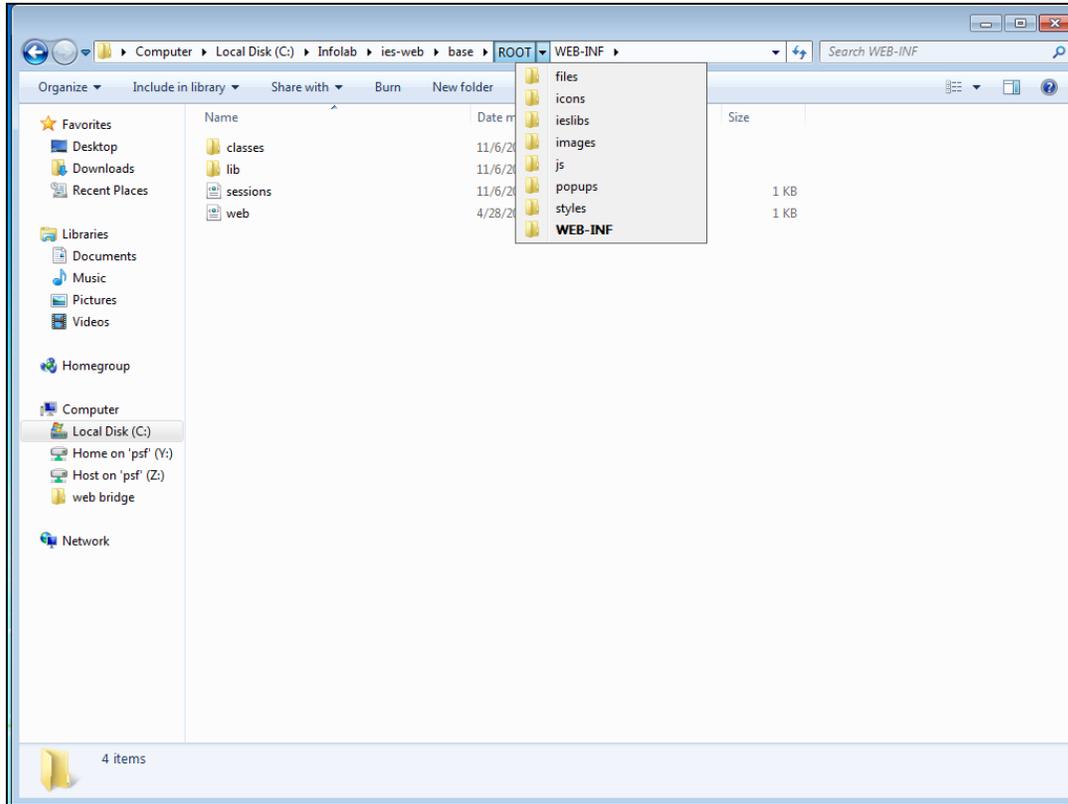


Slide 2
Slide notes:

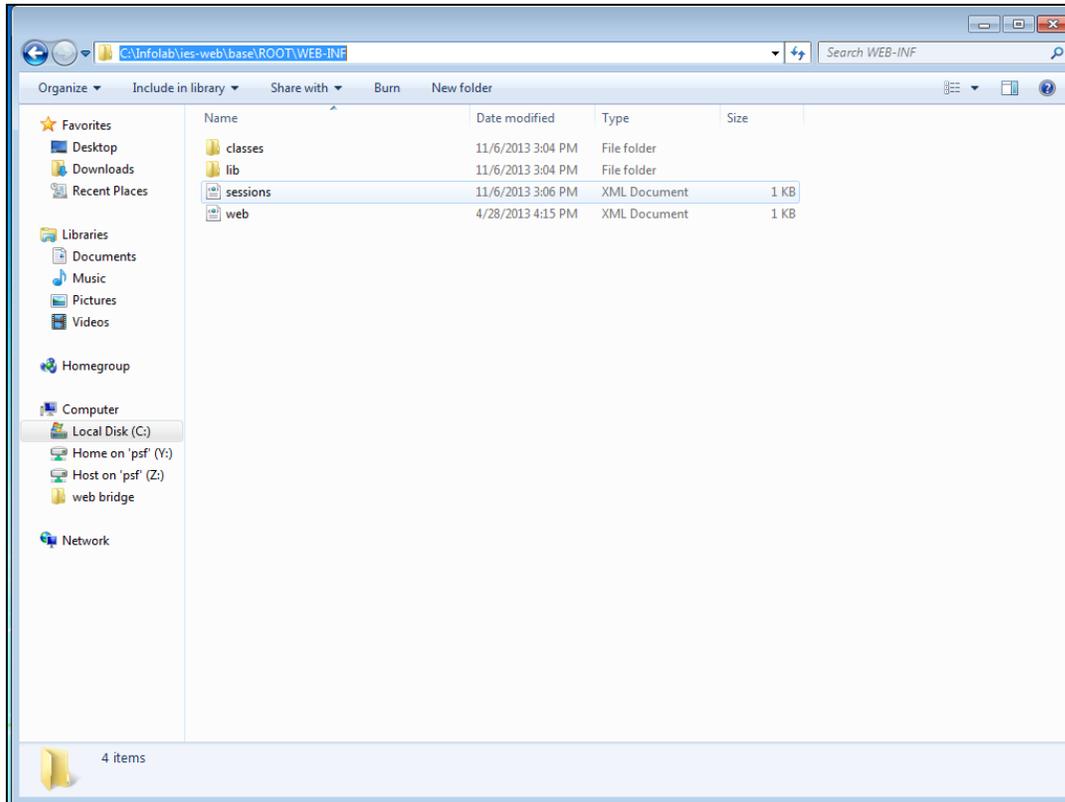


Slide 3


Slide notes: The SESSIONS xml file may be edited for this purpose.

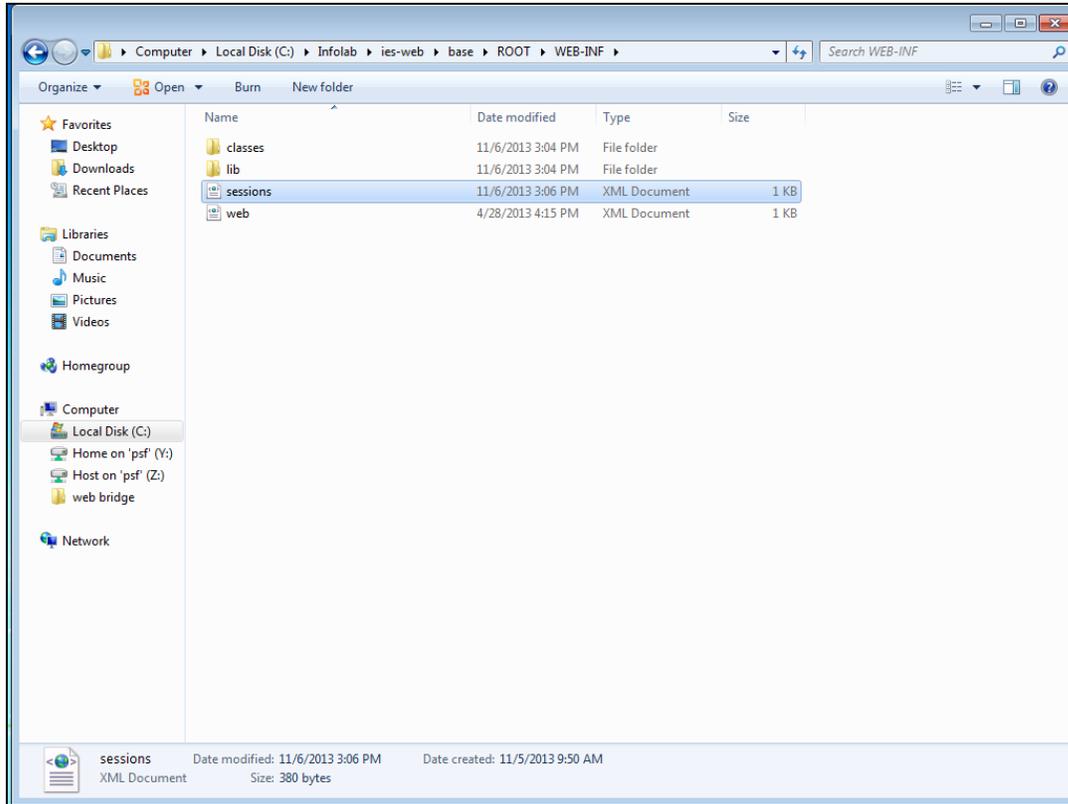


Slide 4
Slide notes:

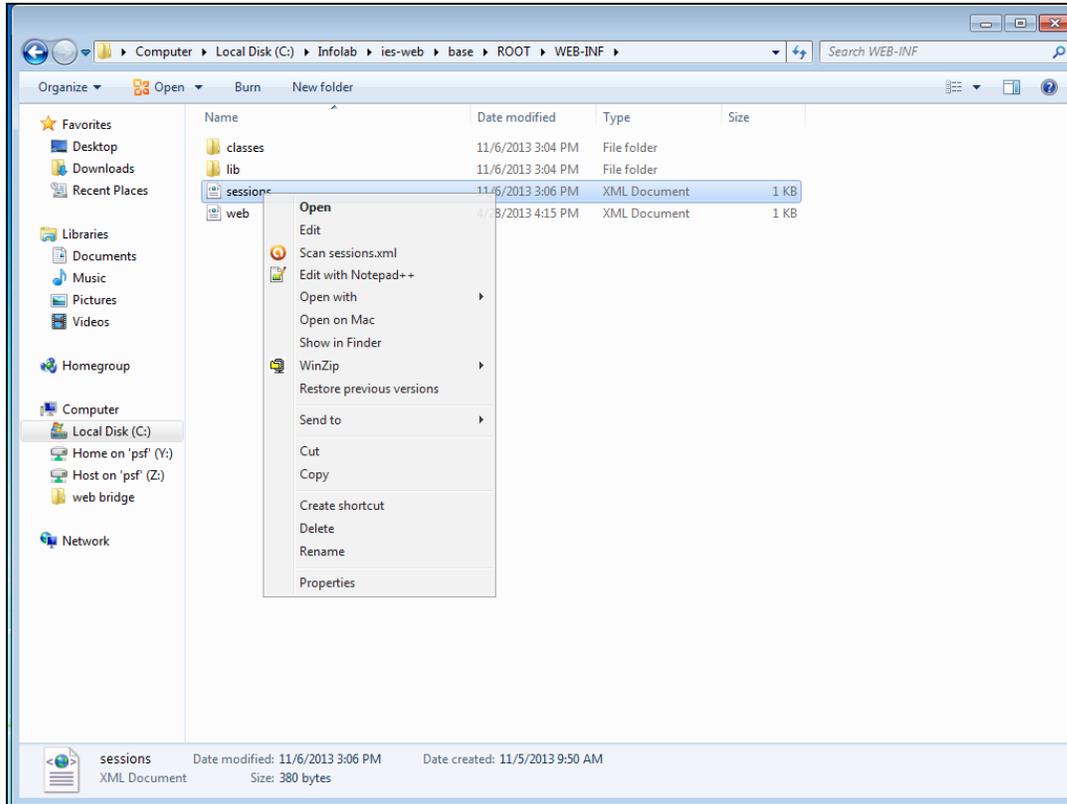


Slide 5
Slide notes:

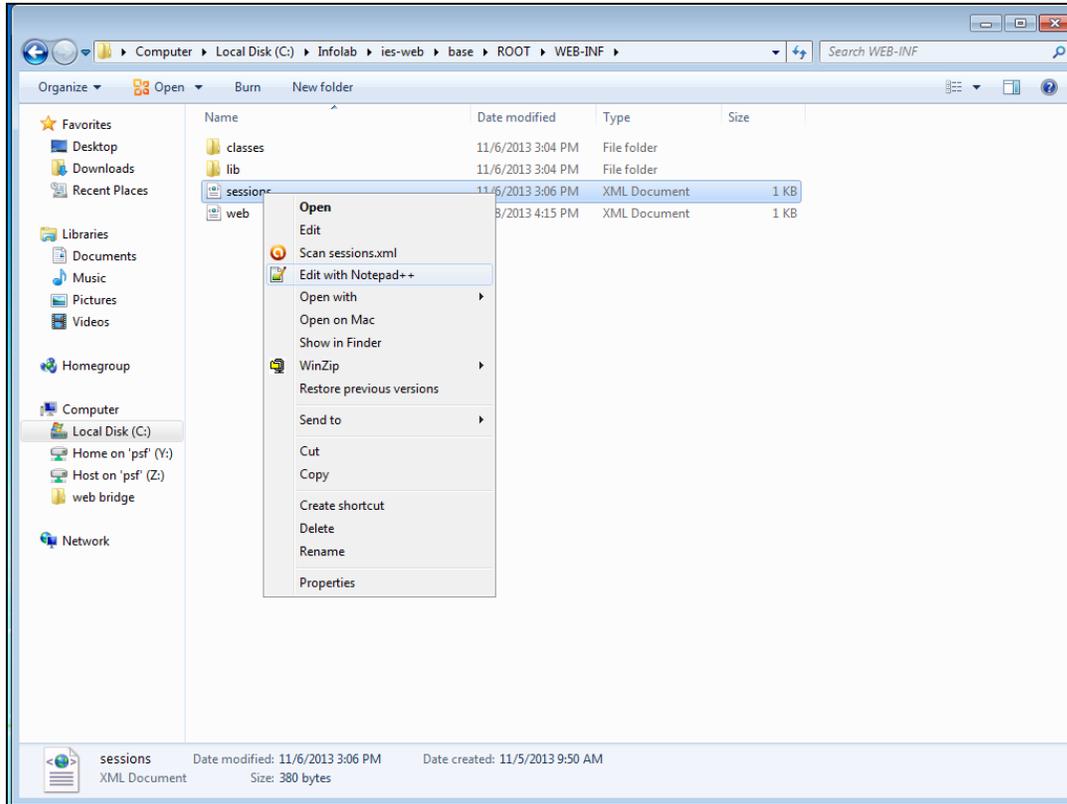

Slide 6
Slide notes:

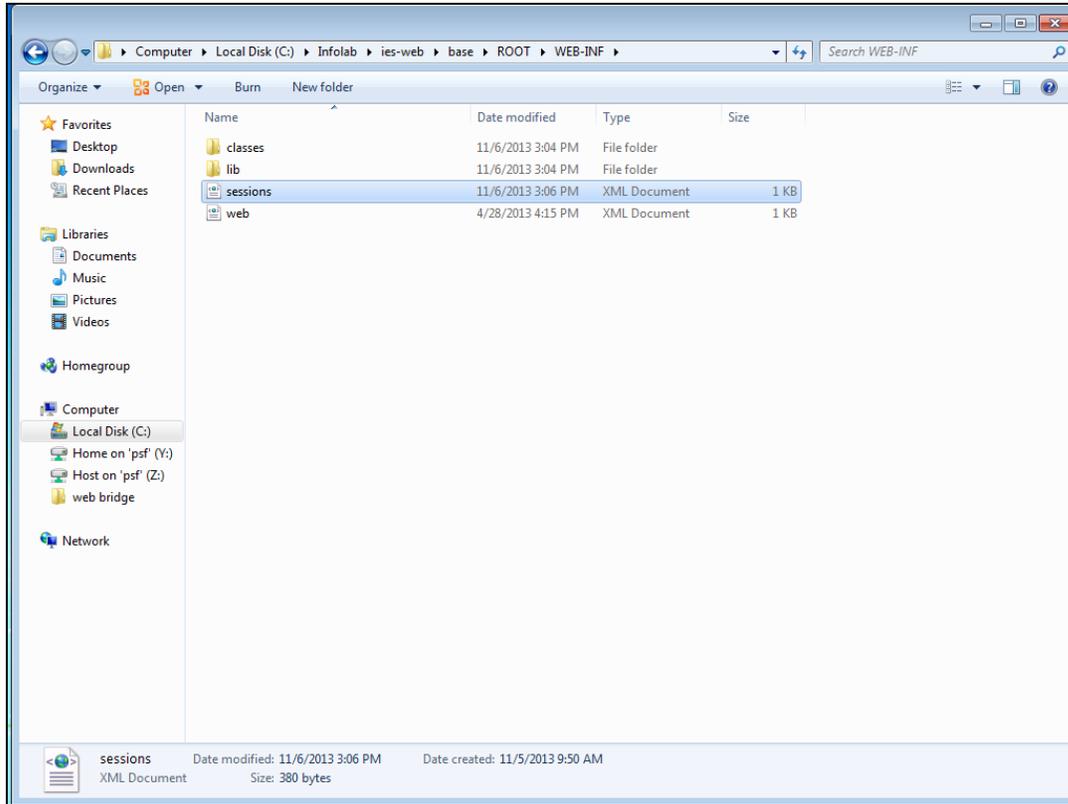


Slide 7
Slide notes:

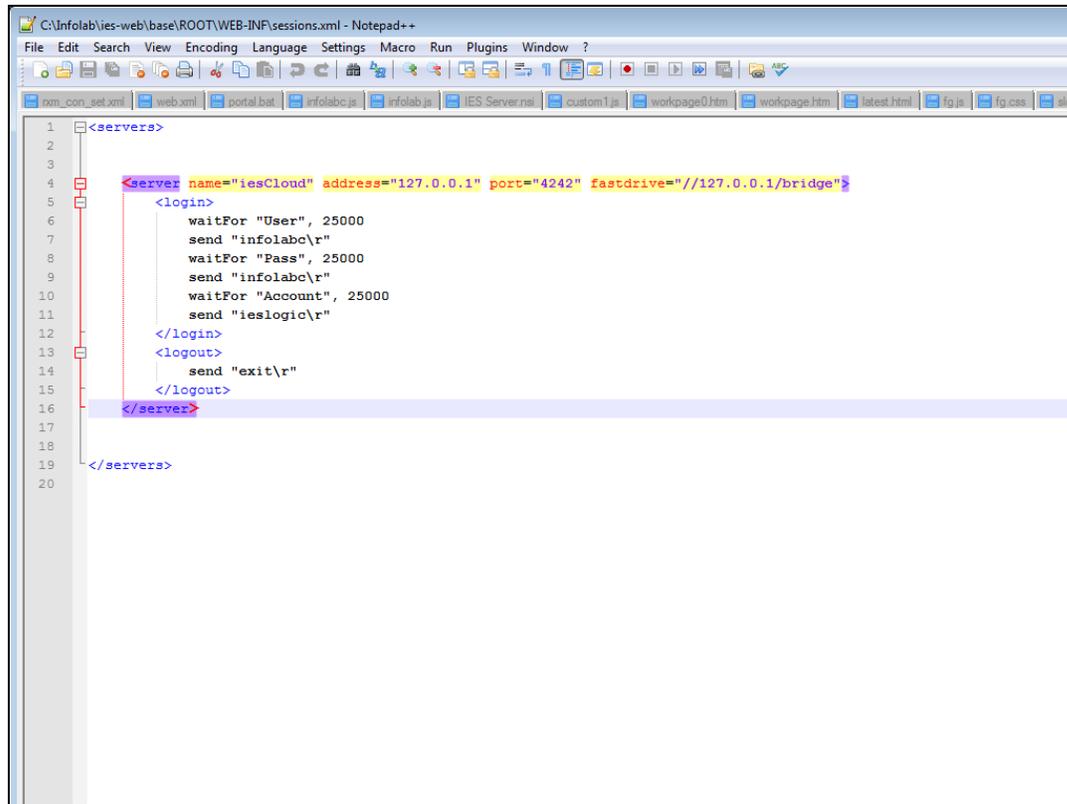


```
C:\Infolab\ies-web\base\ROOT\WEB-INF\sessions.xml - Notepad++
File Edit Search View Encoding Language Settings Macro Run Plugins Window ?
nm_con_set.xml web.xml portal.bat infolabc.js infolab.js IES.Server.nsi custom1.js workpage0.htm workpage.htm latest.html fg.js fg.css slog
1 <servers>
2
3
4 <server name="iesCloud" address="127.0.0.1" port="4242" fastdrive="//127.0.0.1/bridge">
5
6 <login>
7     waitfor "User", 25000
8     send "infolabc\r"
9     waitfor "Pass", 25000
10    send "infolabc\r"
11    waitfor "Account", 25000
12    send "ieslogic\r"
13 </login>
14 <logout>
15     send "exit\r"
16 </logout>
17 </server>
18
19 </servers>
20
```

Slide 8

Slide notes: The block from 'server' to '/server' can be copied and pasted, and then edited for more sessions.




Slide 9
Slide notes:

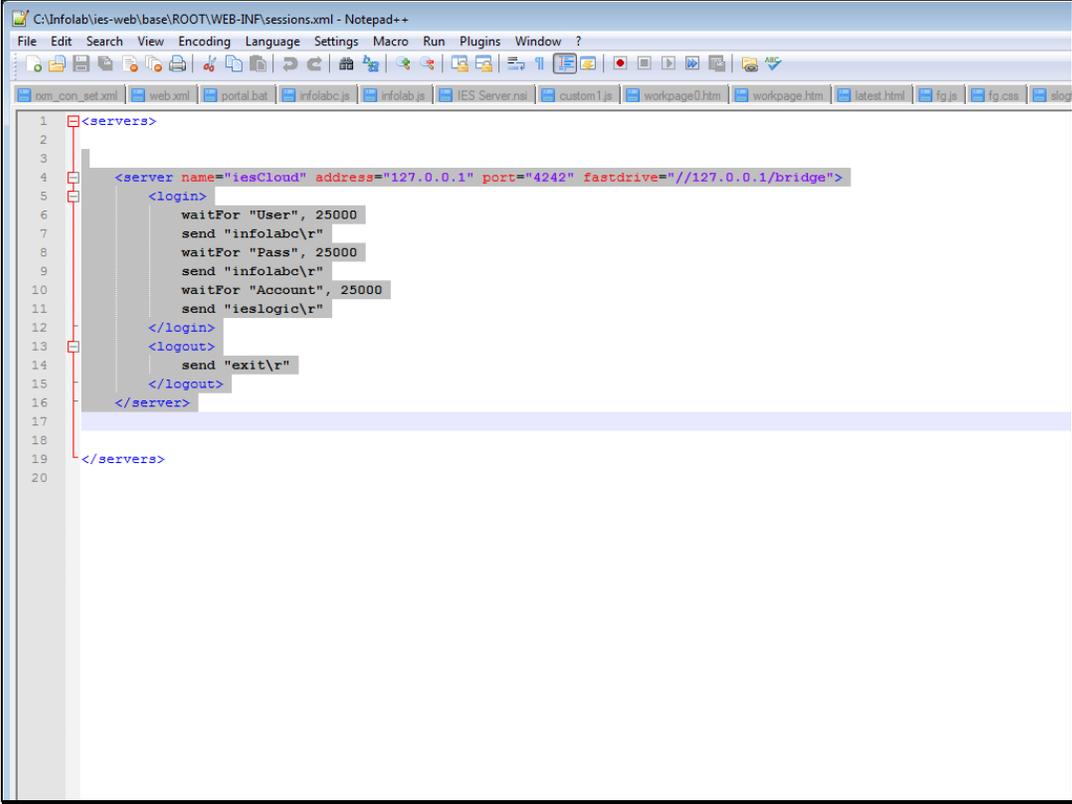

```
1 <servers>
2
3
4 <server name="iesCloud" address="127.0.0.1" port="4242" fastdrive="//127.0.0.1/bridge">
5   <login>
6     waitFor "User", 25000
7     send "infolabc\r"
8     waitFor "Pass", 25000
9     send "infolabc\r"
10    waitFor "Account", 25000
11    send "ieslogic\r"
12  </login>
13  <logout>
14    send "exit\r"
15  </logout>
16 </server>
17
18
19 </servers>
20
```

Slide 10
Slide notes:

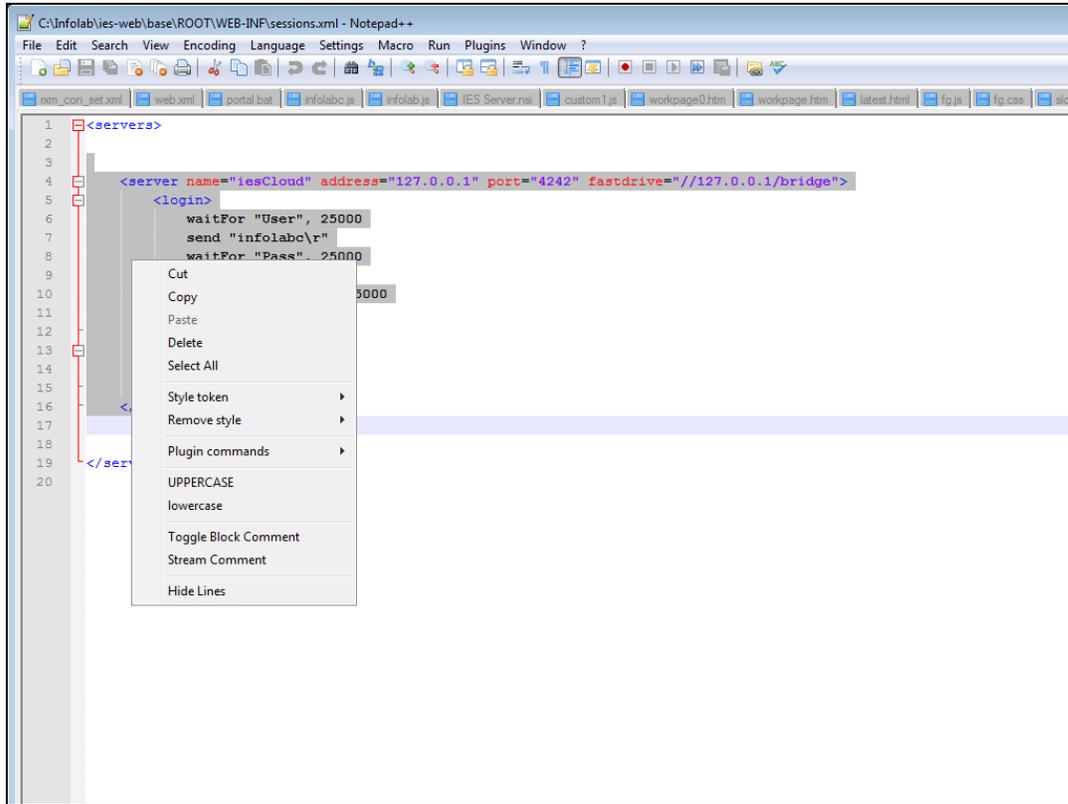


```
1 <servers>
2
3
4 <server name="iesCloud" address="127.0.0.1" port="4242" fastdrive="//127.0.0.1/bridge">
5   <login>
6     waitFor "User", 25000
7     send "infolabc\r"
8     waitFor "Pass", 25000
9
10
11
12
13
14
15
16 </server>
17
18
19
20 </servers>
```

Slide 11
Slide notes:


```
1 <servers>
2
3
4 <server name="iesCloud" address="127.0.0.1" port="4242" fastdrive="//127.0.0.1/bridge">
5   <login>
6     waitFor "User", 25000
7     send "infolabc\r"
8     waitFor "Pass", 25000
9
10
11
12
13
14
15
16 </server>
17
18
19
20 </servers>
```

Slide 12
Slide notes:

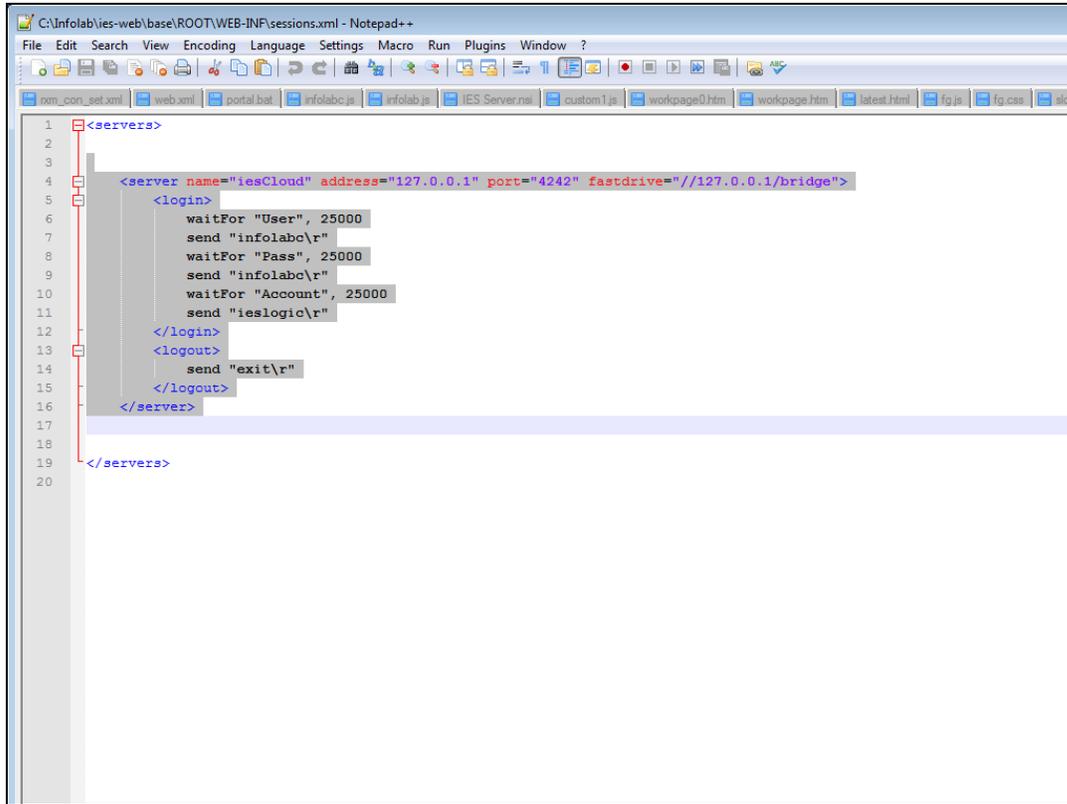

```
1 <servers>
2
3
4 <server name="iesCloud" address="127.0.0.1" port="4242" fastdrive="//127.0.0.1/bridge">
5   <login>
6     waitFor "User", 25000
7     send "infolabc\r"
8     waitFor "Pass", 25000
9     send "infolabc\r"
10    waitFor "Account", 25000
11    send "ieslogic\r"
12  </login>
13  <logout>
14    send "exit\r"
15  </logout>
16 </server>
17
18
19 </servers>
20
```


Slide 13
Slide notes:

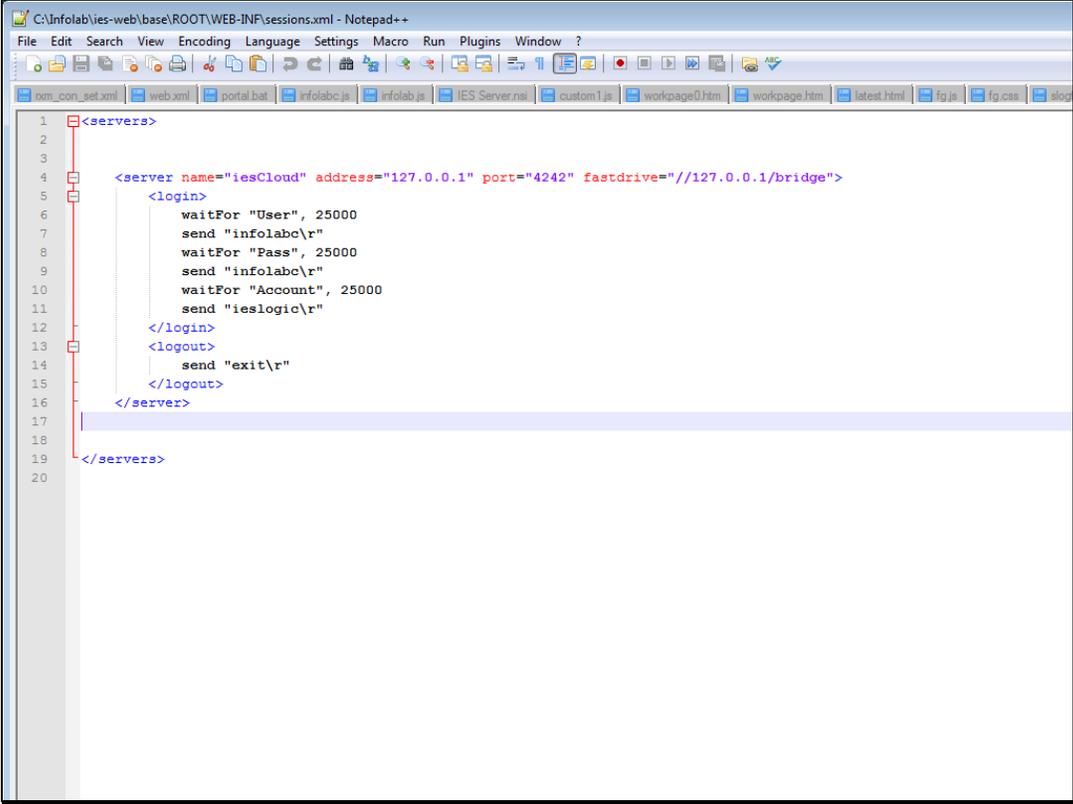

```
C:\Infolab\ies-web\base\ROOT\WEB-INF\sessions.xml - Notepad++
File Edit Search View Encoding Language Settings Macro Run Plugins Window ?
nm_con_set.xml web.xml portal.bat infolabc.js infolab.js IES.Server.nsi custom1.js workpage0.htm workpage.htm latest.html fg.js fg.css slop

1 <servers>
2
3
4 <server name="iesCloud" address="127.0.0.1" port="4242" fastdrive="//127.0.0.1/bridge">
5 <login>
6     waitFor "User", 25000
7     send "infolabc\r"
8     waitFor "Pass", 25000
9     send "infolabc\r"
10    waitFor "Account", 25000
11    send "ieslogic\r"
12 </login>
13 <logout>
14     send "exit\r"
15 </logout>
16 </server>
17
18
19 </servers>
20
```

Slide 14
Slide notes:

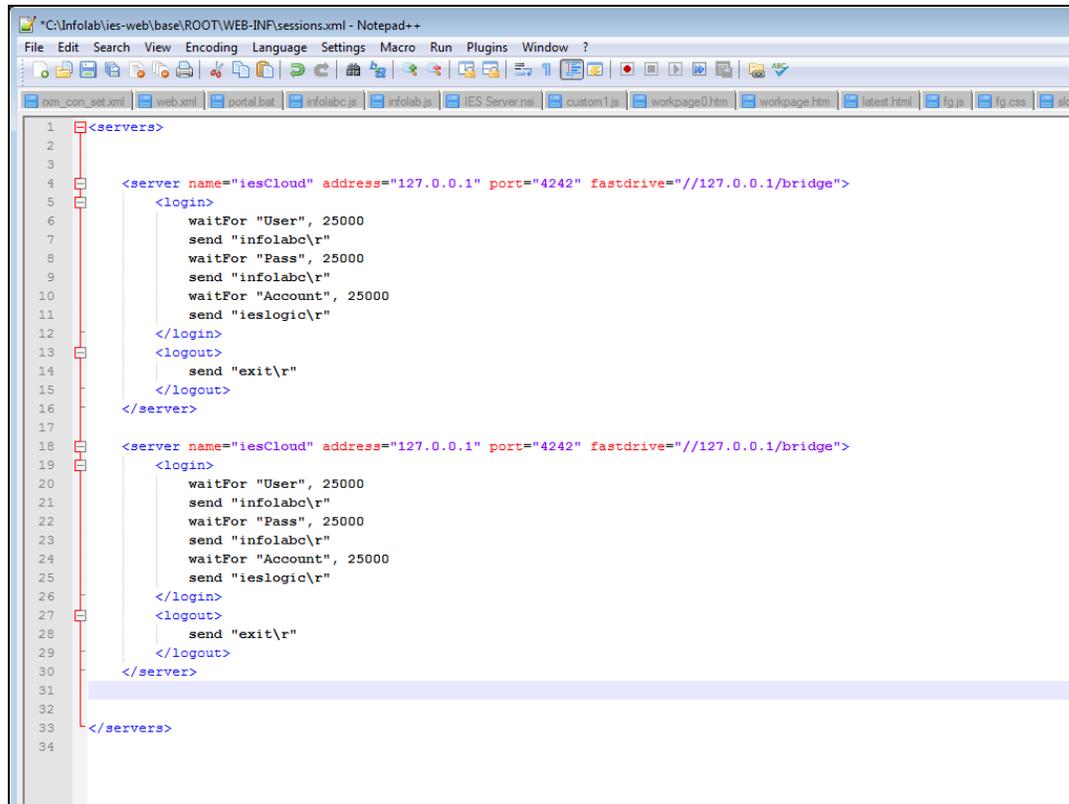


```
1 <servers>
2
3
4 <server name="iesCloud" address="127.0.0.1" port="4242" fastdrive="//127.0.0.1/bridge">
5
6   <login>
7     waitFor "User", 25000
8     send "infolabc\r"
9     waitFor "Pass", 25000
10    send "infolabc\r"
11    waitFor "Account", 25000
12    send "ieslogic\r"
13  </login>
14  <logout>
15    send "exit\r"
16  </logout>
17 </server>
18
19 <server name="iesCloud" address="127.0.0.1" port="4242" fastdrive="//127.0.0.1/bridge">
20
21   <login>
22     waitFor "User", 25000
23     send "infolabc\r"
24     waitFor "Pass", 25000
25     send "infolabc\r"
26     waitFor "Account", 25000
27     send "ieslogic\r"
28   </login>
29   <logout>
30     send "exit\r"
31   </logout>
32 </server>
33 </servers>
34
```

Slide 15
Slide notes:

Slide 16
Slide notes:

Page 16 of 17

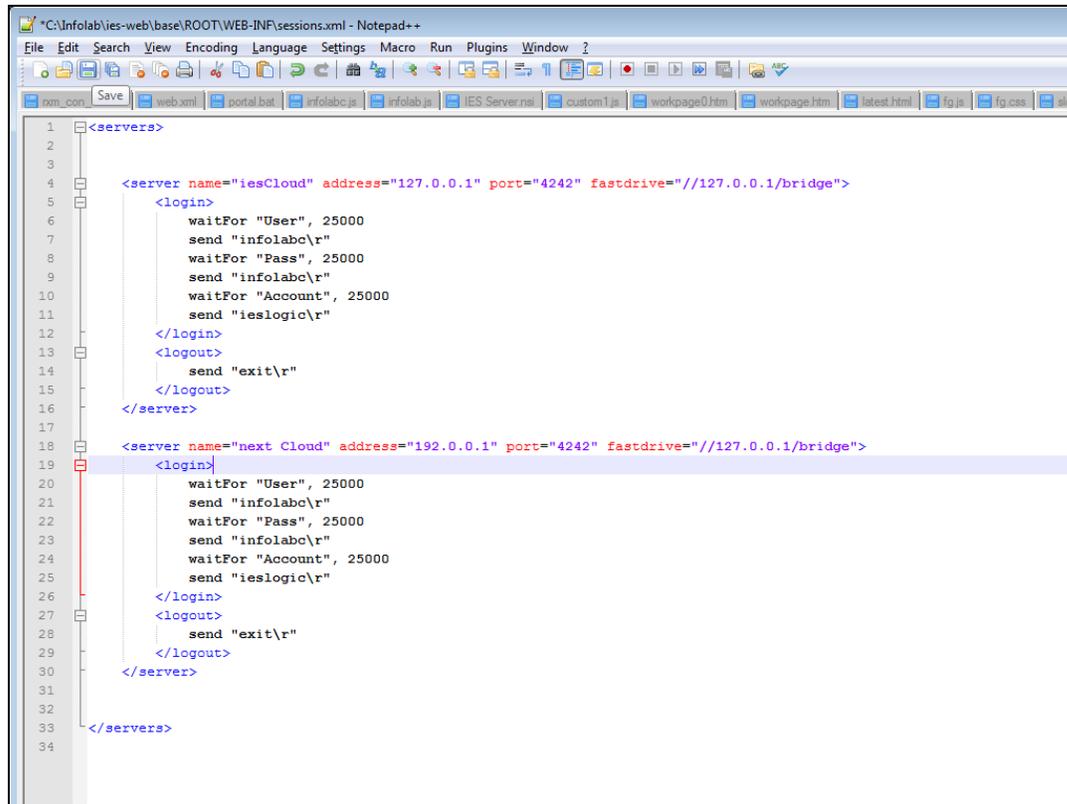

```
1 <servers>
2
3
4 <server name="iesCloud" address="127.0.0.1" port="4242" fastdrive="//127.0.0.1/bridge">
5   <login>
6     waitFor "User", 25000
7     send "infolabc\r"
8     waitFor "Pass", 25000
9     send "infolabc\r"
10    waitFor "Account", 25000
11    send "ieslogic\r"
12  </login>
13  <logout>
14    send "exit\r"
15  </logout>
16 </server>
17
18 <server name="next Cloud" address="192.0.0.1" port="4242" fastdrive="//127.0.0.1/bridge">
19   <login>
20     waitFor "User", 25000
21     send "infolabc\r"
22     waitFor "Pass", 25000
23     send "infolabc\r"
24     waitFor "Account", 25000
25     send "ieslogic\r"
26   </login>
27   <logout>
28     send "exit\r"
29   </logout>
30 </server>
31
32 </servers>
33
34
```

Slide 17
Slide notes: